




TECHNICAL DATA SHEET

PRODUCT	HYDROSTATIC TEST EQUIPMENT
MODEL	EC-1012REX
SERIES	SERIE EC-REX

Lightweight portable, economic, safety, durable and easy to operate made in USA with highest quality components for low operational cost. EC-1012REX equipment are available for use on a wide range of fluids including water, oil/hydraulic and other solubles. EC-1012REX are used in most industries including Oil & Gas.

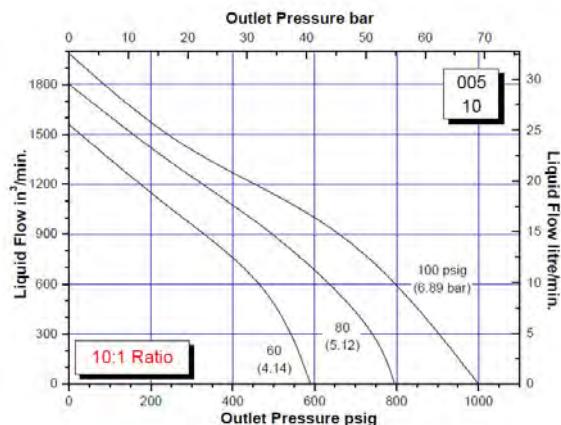

FEATURES/BENEFITS

- Designed for easy maintenance
- Made with USA highest quality components
- All tubing and fittings are stainless steel 316
- Ports: Air supply 1/2 NPT, liquid inlet 1/2 NPT, discharge 1/2 NPT
- CS Frame, Unit weight: 70 pounds Dimensions: 16" x 19" x 16"
- Shipping weight: 90 lbs
-

SPECIFICATIONS

Output Flow	3 GPM (12 LPM)
Max Output Pressure	1000 psi (69 bar)
Air Supply	100 Psi
Inlet	1/2 female NPT
Outlet	1/2 female NPT
Pump	SC-Hydraulic Ratio 20:1

GENERAL PRODUCT INFORMATION

- When operating from 0 to rated hydraulic pressure, air consumption will be approximately 56 scfm of free air at 100 psi output. At lower air pressures and higher hydraulic pressures air consumption will be reduced proportionately to flow rates indicated.
- The EC-REX Series "Dry Lube" pump does not require an air line lubricator. Maintenance parts for future repairs, all components and accessories can be found on our website

- www.hydrorex.com